
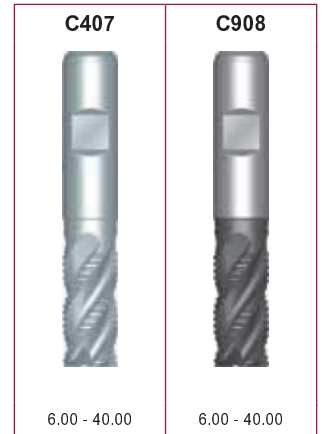


**C407** HSS-E PM NRA Z 4-6  $\lambda 35^\circ$   $\gamma 12^\circ$  DIN 1835B k12 DIN 844K

**C908** HSS-E PM NRA Z 4-6  $\lambda 35^\circ$   $\gamma 12^\circ$  DIN 1835B Alcrona k12 DIN 844K

- C407**
- Spåndelände Pinnfräsar
  - Rouhintajyrismet
- C908**
- Spåndelände Pinnfresere
  - Spåndelände Sporfræsere

<b>C407</b>	▪	1.2	1.3	1.4	1.5	2.1	2.3	3.1	3.2	3.3	3.4	4.2	4.3	5.2	5.3	6.2	
	•	1.1	1.6	2.2	4.1	5.1	6.4	7.4									
<b>C908</b>	▪	1.3	1.4	1.5	2.1	2.2	2.3	3.1	3.2	3.3	3.4	4.2	4.3	5.2	5.3	6.2	
	•	1.6	4.1	5.1	6.4	7.4											

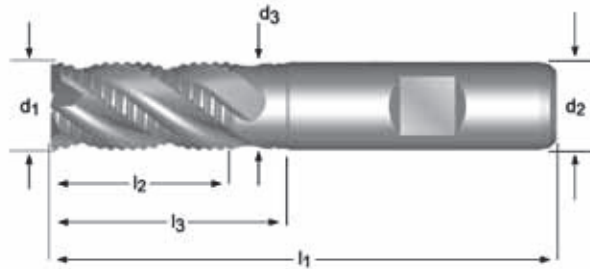

$d_1$ Ø mm	$d_2$ Ø <sub>h6</sub> mm	$l_2$ mm	$l_1$ mm	z	$l_3$ mm	$d_3$ Ø mm	C407	C908
6.00	6	13	57	4	-	-	C4076.0	C9086.0
7.00	10	16	66	4	-	-	C4077.0	C9087.0
8.00	10	19	69	4	-	-	C4078.0	C9088.0
9.00	10	19	69	4	-	-	C4079.0	C9089.0
10.00	10	22	72	4	31.5	9.5	C40710.0	C90810.0
11.00	12	22	79	4	-	-	C40711.0	C90811.0
12.00	12	26	83	4	37.5	11.5	C40712.0	C90812.0
13.00	12	26	83	4	37.5	11.5	C40713.0	C90813.0
14.00	12	26	83	4	37.5	11.5	C40714.0	C90814.0
15.00	12	26	83	4	37.5	11.5	C40715.0	C90815.0
16.00	16	32	92	4	43.5	15.5	C40716.0	C90816.0
18.00	16	32	92	4	43.5	15.5	C40718.0	C90818.0
20.00	20	38	104	4	53.5	19.5	C40720.0	C90820.0
22.00	20	38	104	4	53.5	19.5	C40722.0	C90822.0
25.00	25	45	121	6	64.5	24.5	C40725.0	C90825.0
28.00	25	45	121	6	64.5	24.5	C40728.0	C90828.0
30.00	25	45	121	6	64.5	24.5	C40730.0	C90830.0
32.00	32	53	133	6	72.5	31.5	C40732.0	C90832.0
36.00	32	53	133	6	72.5	31.0		C90836.0
40.00	40	63	155	6	84.5	39.0	C40740.0	C90840.0